






PRACTICAL
PANORAMIC DOORS
AluTrend



AluTrend


ORIGINAL AND INDIVIDUAL DESIGNS



New glazing structure ensures:

- improved sealing;
- deformation resistance;
- excellent thermal insulation properties.

Infill options for **AluTrend** Series doors

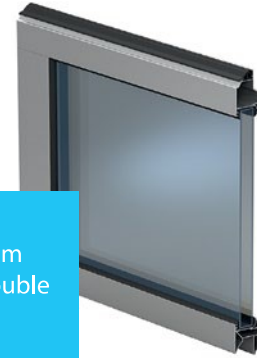


26mm
acrylic double
glazing

Modern impact-resistance material with max. translucency is used .



26mm
aluminium
composite
infill material

These panels are made from two sheets of aluminium with stucco embossment and filled with polyurethane foam insulation.

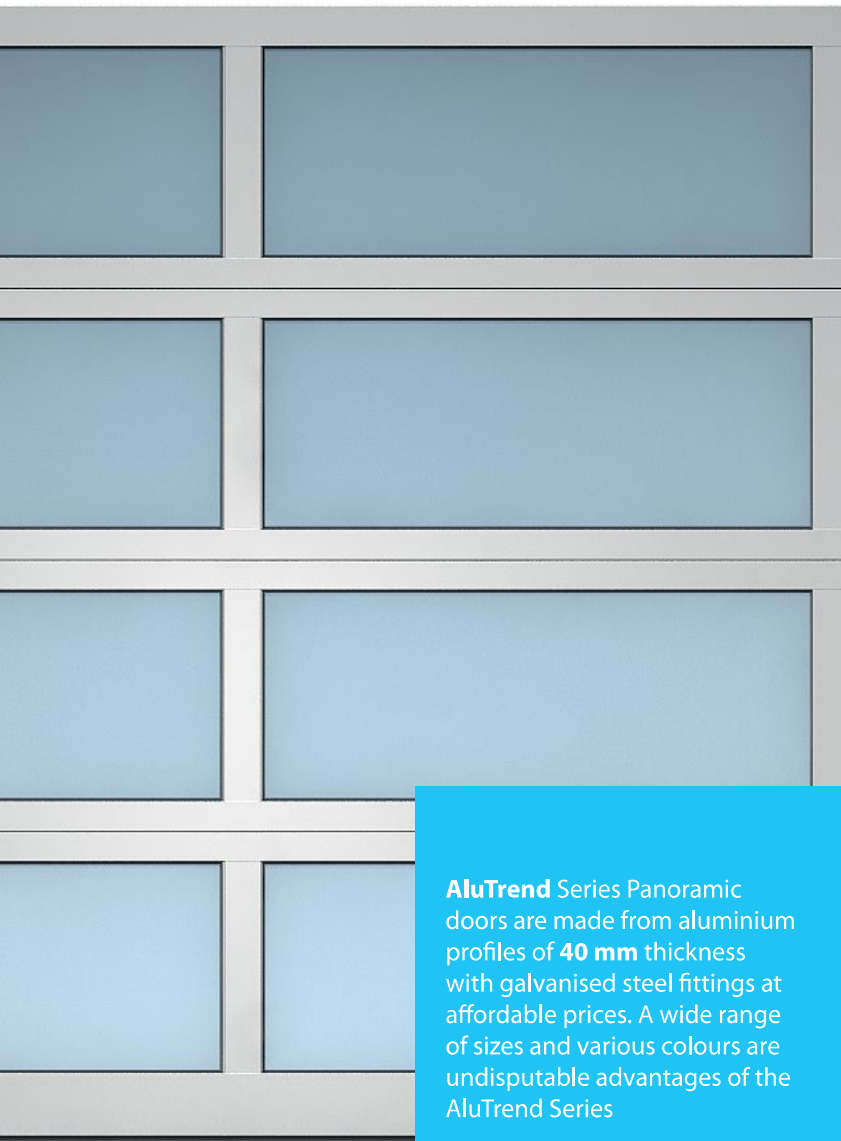

AluTrend Series Panoramic doors are made from aluminium profiles of **40 mm** thickness with galvanised steel fittings at affordable prices. A wide range of sizes and various colours are undisputable advantages of the AluTrend Series



In order to protect glazing from scratches SAN-plastic with antiabrasive coating is used.


Maximal translucency of glazing is kept for a long time even after frequently cleanings.

Panoramic sections mix perfectly with sandwich panels of 40 mm thickness, creating a combined door leaf with a harmonious appearance.




9 standard colours


At no extra cost

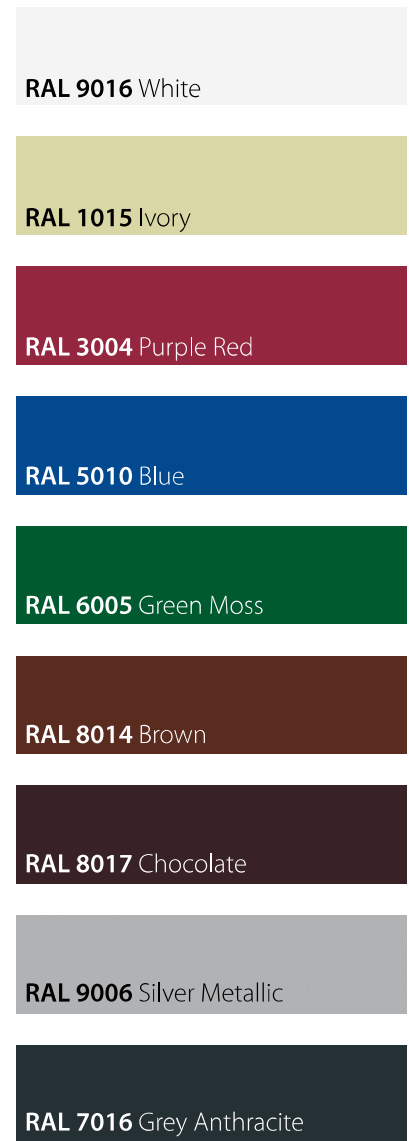


Special grid that could be mounted instead of glazing helps to enlarge the usage of panoramic doors. Perfect solution for car-parks.



Steel grid 40×40 mm.
Cross section of ventilation openings is 83%.



Steel drawn grid.
Cross section of ventilation openings is 58%.



Perforated aluminium sheet (perforation 8–12 mm).
Cross section of ventilation openings is 40%.

Colours are close to RAL scale.
Upon request, the doors can be painted both inside and outside in a different RAL colour or in the ADS703 colour.

